



Raleigh Series Ceiling Mount



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
RL1207C	ABT	2-100W A21 (200W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
	• W 12" • HT 10"							
RL1408C	GHB	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
	ABV	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
RL1609C	GJK	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
	ABX	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
RL1811C	GHD	5,400lm LED (33W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
	ABZ	3-100W A21 (300W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
RL2208C	FXI	9,700lm LED (58W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
	GML	13,600lm LED (109W)	1	PC	WA AG	CC FM	SQ	SIL LOGO
	GEM	6-60W A19 (360W)	1	PC	WA AG	CC FM	SQ	SIL LOGO

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale	Abbreviation Key
	Lamps
	100W A21 Medium Base, 100W Max, Incandesent or LED
	60W A19 Medium Base, 60W Max, Incandesent or LED
	Finish Types
	PC Powder Coat

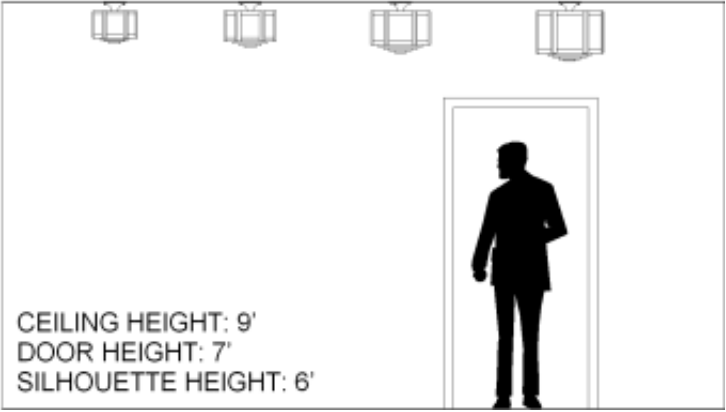

CEILING HEIGHT: 9'
DOOR HEIGHT: 7'
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Diffuser Types

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

CC	Ceiling Canopy
FM	Flush Mount

Louvers

SQ	Square Cell
----	-------------

Dimming Types

0	D1
1	D2

Options

SIL	Silhouette Symbol
LOGO	Custom Logo