
# Craft Metal Products Inc.

# **Raleigh Series Pendant**





Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
RL1224L • W 12 • HT 31 • OAH 72	GBL	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO


(OverAll Height)

<b>RL1426L</b> • W 14 • HT 34	DVG	14,500lm LED (86W)	5,100lm LED(36W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
• OAH 96 (OverAll Height)	DFB	14,500lm LED (86W)	7,100lm LED(51W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	DTG	14,500lm LED(86W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	EOB	23,100lm LED(146W)	7,100lm LED(51W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	DFJ	23,100lm LED(146W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	FIH	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
<b>RL1631L</b> • W 16 • HT 40	DFA	14,500lm LED(86W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
• OAH 96 (OverAll Height)	DLX	23,100lm LED(146W)	12,500lm LED(93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	DCR	29,500lm LED(192W)	12,500lm LED (93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
	FII	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA	ST	SQ	SIL

						AG	CH SM SP		LOGO
RL1836L • W 18 • HT 46	FYJ	24,900lm LED(146W)	12,500lm LED(93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
• OAH 120 (OverAll Height)	FIJ	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
RL2242L • W 22 • HT 55	GGO	31,000lm LED(185W)	12,500lm LED(93W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO
• OAH 120 (OverAll Height)	FIL	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA AG	ST CH SM SP	SQ	SIL LOGO

#### SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

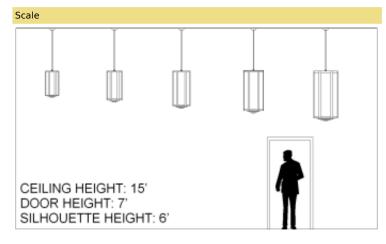

#### PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

## Abbreviation Key

Lamps	
60W A19	Medium Base, 60W Max, Incandesent or LED
100W PAR38	Medium Base, 100W Max, Incandesent or LED

## **Finish Types**

PC

Powder Coat

#### **Diffuser Types**

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

#### Mountings

mountings	
ST	Stem
СН	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem

## Louvers

SQ

Square Cell

Dimming	g Types		
0	D3		
1	D1		
2	D2		
3	D16		

# Options

SIL	Silhouette Symbol
LOGO	Custom Logo