


Richmond Series 6-Arm Satellite Pendant



Model Number	Lamping Code	Body Lamping	Satellite Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louwer
RM4836A	EIB	5-60W A19 (300W)	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	WA AG	ST CH SP	SQ
• W 48 • HT 44 • OAH 96 (OverAll Height) • X 1 @ 14"x44" • Y 6 @ 10"x22"									
RM6045A	EIC	9-60W A19 (540W)	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	WA AG	ST CH SP	SQ
• W 60 • HT 54 • OAH 120 (OverAll Height) • X 1 @ 16"x54" • Y 6 @ 12"x24"									
RM7254A	EID	12-60W A19 (720W)	12-60W A19 (720W)	1-26W PAR38 LED (26W)	3	PC	WA AG	ST CH SP	SQ
• W 72 • HT 64 • OAH 120 (OverAll Height) • X 1 @ 18"x64" • Y 6 @ 14"x26"									

SAMPLE CATALOG NUMBER	
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options	
Scale	Abbreviation Key
Lamps	
60W A19	Medium Base, 60W Max, Incandesent or LED
26W PAR38 LED	Medium Base, 26W Max, LED
Finish Types	
PC	Powder Coat
Diffuser Types	

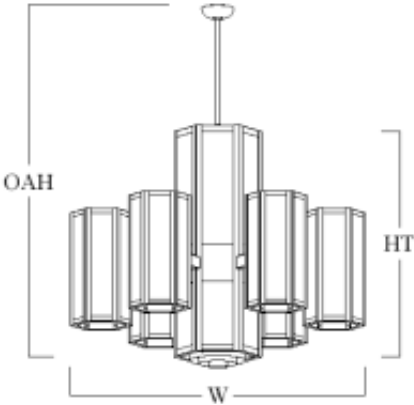

CEILING HEIGHT: 15'
DOOR HEIGHT: 7'
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for three circuit operation (Body Lamping/Down Lamping/Satellite Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others). Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

WA	Standard Acrylic Diffuser
AG	Premium Glass Diffuser

Mountings

ST	Stem
CH	Chain
SP	Steep Pitch Canopy for Stem

Louvers

SQ	Square Cell
----	-------------