



Riverside Series 3-Arm Cluster Pendant

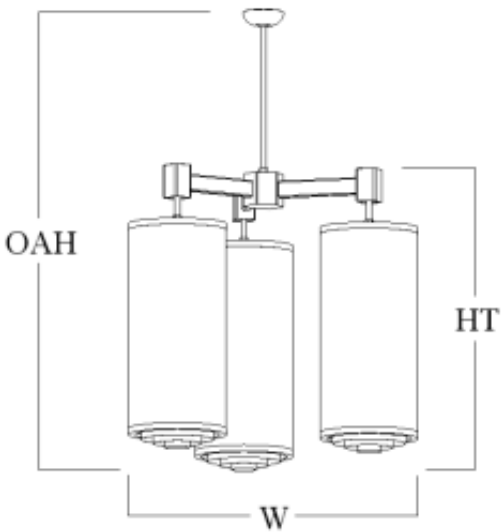

Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Diffuser Accent	Mounting	Louver	Options
RS3026U	GCH	12-60W A19 (720W)	3-100W A19 (300W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	• W 27" • HT 32" • OAH 72" (OverAll Height) • Y 3 @ 10"x24"									
	DQI	43,600lm LED (258W)	21,400lm LED (152W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	DQJ	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	GCI	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
RS3931U	EAT	43,600lm LED (258W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	DQD	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	DSG	88,700lm LED (575W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	GCI	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	GDX	74,800lm LED (436W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
RS3936U	GCH	12-60W A19 (720W)	3-100W A19 (300W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	• W 27" • HT 32" • OAH 72" (OverAll Height) • Y 3 @ 10"x24"									
	DQI	43,600lm LED (258W)	21,400lm LED (152W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	DQJ	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	GCI	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
RS3931U	EAT	43,600lm LED (258W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	DQD	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	DSG	88,700lm LED (575W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	GCI	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	GDX	74,800lm LED (436W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
RS3936U	GCH	12-60W A19 (720W)	3-100W A19 (300W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	• W 39" • HT 44" • OAH 120" (OverAll Height) • Y 3 @ 12"x36"									
	DQI	43,600lm LED (258W)	21,400lm LED (152W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	DQJ	69,300lm LED (436W)	37,600lm LED (278W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO
	GCI	18-60W A19 (1080W)	3-100W A21 (300W)	2	PC	WA	DAC CDA	ST SP	SQ	SIL LOGO

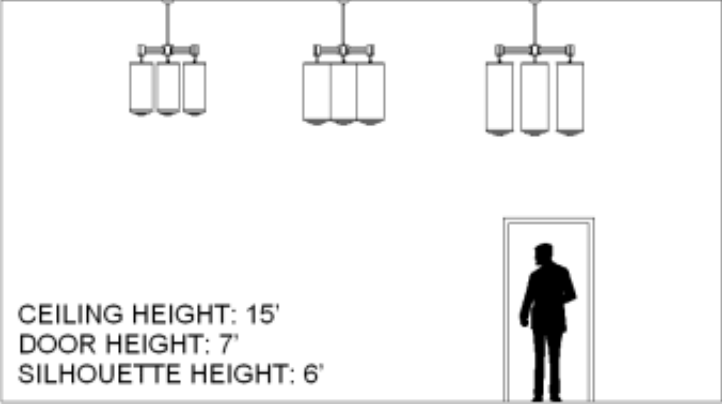

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamps	
60W A19	Medium Base, 60W Max, Incandescent or LED
100W A19	Medium Base, 100W Max, Incandescent or LED
Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser
Diffuser Accent Types	
DAC	Diffuser Accent Color
CDA	Custom Diffuser Accent
Mountings	
ST	Stem
SP	Steep Pitch Canopy for Stem
Louvers	
SQ	Square Cell
Dimming Types	
0	D1
Options	
SIL	Silhouette Symbol
LOGO	Custom Logo