
# Craft Metal Products Inc.

# **Riverside Series Pendant**






Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Diffuser Accent	Mounting	Louver	Option
• W 11 • HT 24 • OAH 72 (OverAll Height)	GBK	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
RS1226L  • W 13  • HT 26  • OAH 96 (OverAll Height)	DVD	14,500lm LED (86W)	5,100lm LED (36W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	DNY	14,500lm LED (86W)	7,100lm LED (51W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	DNZ	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	DOA	23,100lm LED (146W)	7,100lm LED (51W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	ETG	23,100lm LED (146W)	10,400lm LED (76W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	DOB	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	FIY	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
RS1231L  • W 13  • HT 31  • OAH 96  (OverAll Height)	DXL	14,500lm LED (86W)	7,100lm LED (51W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	DOS	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	DMF	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WA	DAC	ST	SQ	SIL

							CDA	CH SM SP		LOGO
	DKO	29,500lm LED (192W)	12,500lm LED (93W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	FIZ	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
RS1236L  • W 13  • HT 36  • OAH 96  (OverAll Height)	GKG	10,800lm LED (60W)		1	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	GDZ	15,400lm LED (86W)	5,100lm LED (36W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	GEF	17,800Im LED (100W)	12,500lm LED (93W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	GES	24,900lm LED (146W)	12,500lm LED (93W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	GEV	39,000lm LED (267W)	12,500lm LED (93W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	GIX	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO

### SAMPLE CATALOG NUMBER

# Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

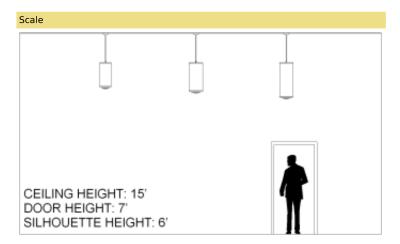

## PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

# Abbreviation Key

# Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED
100W PAR38 Medium Base, 100W Max, Incandesent or LED

# Finish Types

PC Powder Coat

# Diffuser Types

WA Standard Acrylic Diffuser

# Diffuser Accent Types

DAC Diffuser Accent Color
CDA Custom Diffuser Accent

# Mountings

ST Stem
CH Chain

SM Surface Mount Chain

SP Steep Pitch Canopy for Stem

### Louvers

SQ Square Cell

## **Dimming Types**

0 D1 1 D2

2 D3

Options

SIL Silhouette Symbol LOGO Custom Logo