

Riverside Series Wall Bracket




Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Diffuser Accent	Mounting	Louver	Options
RS0816B • W 8" • HT 16" • EXT 11"	AHZ	1-100W A21 (100W)	1	PC	WA	DAC CDA	WM		BL LOGO SIL
RS1020B • W 10" • HT 20" • EXT 13"	DEM	3,900lm LED (24W)	1	PC	WA	DAC CDA	WM	SQ	BL D1 LOGO SIL
	AIB	1-100W A21 (100W)	1	PC	WA	DAC CDA	WM	SQ	BL LOGO SIL
RS1224B • W 12" • HT 24" • EXT 15"	FFX	5,400lm LED (33W)	1	PC	WA	DAC CDA	WM	SQ	BL D1 D3 LOGO SIL
	GBW	2-100W A21 (200W)	1	PC	WA	DAC CDA	WM	SQ	BL LOGO SIL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

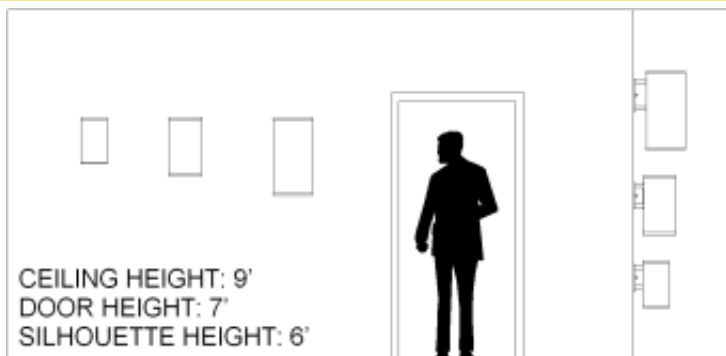

PRODUCT FEATURES

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

WA Standard Acrylic Diffuser

Diffuser Accent Types

DAC Diffuser Accent Color

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

CDA Custom Diffuser Accent

Mountings

WM Wall Mount

Louvers

SQ Square Cell

Dimming Types

0 D1

2 D3

Options

SIL Silhouette Symbol

LOGO Custom Logo

BL Bottom Lens