

## Roxbury Series Pendant




Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Louver
<b>RX1024L</b>	GBK	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	AD	ST CH SM SP	CR SQ
<ul style="list-style-type: none"> <li>• W 10</li> <li>• HT 31</li> <li>• OAH 72 (OverAll Height)</li> </ul>								
<b>RX1226L</b>	DVD	14,500lm LED (86W)	5,100lm LED (33W)	2	PC	AD	ST CH SM SP	CR SQ
<ul style="list-style-type: none"> <li>• W 12</li> <li>• HT 34</li> <li>• OAH 96 (OverAll Height)</li> </ul>								
	DNY	14,500lm LED (86W)	7,100lm LED (47W)	2	PC	AD	ST CH SM SP	CR SQ
	DNZ	14,500lm LED (86W)	12,500lm LED (85W)	2	PC	AD	ST CH SM SP	CR SQ
	DOB	23,100lm LED (146W)	12,500lm LED (85W)	2	PC	AD	ST CH SM SP	CR SQ
	FIY	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	AD	ST CH SM SP	CR SQ
<b>RX1231L</b>	DOS	14,500lm LED (86W)	12,500lm LED (85W)	2	PC	AD	ST CH SM SP	CR SQ
<ul style="list-style-type: none"> <li>• W 12</li> <li>• HT 39</li> <li>• OAH 96 (OverAll Height)</li> </ul>								

DMF	23,100lm LED (146W)	12,500lm LED (85W)	2	PC	AD	ST CH SM SP	CR SQ
DKO	29,500lm LED (192W)	12,500lm LED (85W)	2	PC	AD	ST CH SM SP	CR SQ
FIZ	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	AD	ST CH SM SP	CR SQ

SAMPLE CATALOG NUMBER

**Model Number - Lamping Code - Finish - Mounting - Diffuser - Options**

Scale

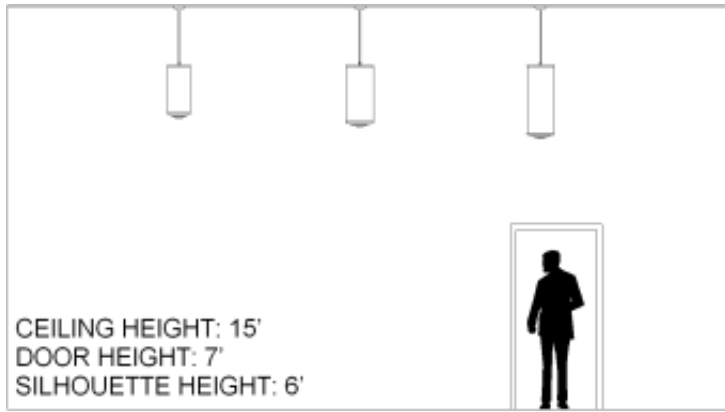

Pendant fixtures may be chain or stem hung.

O. A. Ht. is the standard hanging allowance from the ceiling to the bottom of the fixture.

Extra chain or stem may be added.

Abbreviation Key

Lamps

60W A19 Medium Base, 60W Max, Incandescent or LED

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser

Mountings

- ST Stem
- CH Chain
- SM Surface Mount Chain
- SP Steep Pitch Canopy for Stem

Louvers

- CR Concentric Ring
- SQ Square Cell

Dimming

- D1 LED 0-10v dimming options include integral 120-277v dimming drivers
- D2 LED Triac/ELV dimming options include integral 120v dimming drivers
- D31A LED 0-10v wireless dimming options include integral 120v dimming drivers and one wireless module
- D32A LED 0-10v wireless dimming options include integral 120v dimming drivers and two wireless modules
- D12 LED 0-10v dimming options include integral 120-277v dimming drivers with 1% minimum dimming level