


Sacramento Series Pendant

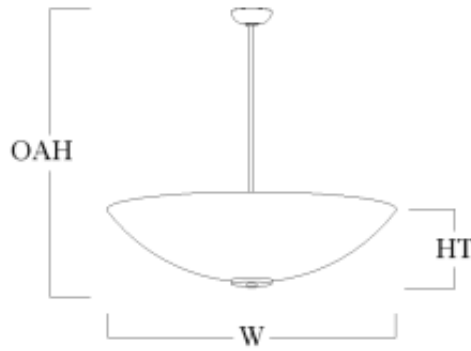

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Options
SC2408L • W 24 • HT 8 • OAH 36 (OverAll Height)	EOL	5,100lm LED (36W)	1	PC	AD PA	AS	D1 DB FD
	BBS	3-100W A21 (300W)	1	PC	AD PA	AS	FD DB
SC3010L • W 30 • HT 10 • OAH 48 (OverAll Height)	EOM	7,700lm LED (53W)	1	PC	AD PA	AS	D1 DB FD
	EEG	13,600lm LED (88W)	1	PC	AD PA	AS	D1 DB FD
	FJP	3-100W A21 (300W)	1	PC	AD PA	AS	FD DB
SC3612L • W 36 • HT 12 • OAH 60 (OverAll Height)	EEF	16,500lm LED (93W)	1	PC	AD PA	AS	D1 DB FD
	ECL	23,400lm LED (146W)	1	PC	AD PA	AS	D1 DB FD
	FJR	6-100W A21 (600W)	1	PC	AD PA	AS	FD DB
SC4212L • W 42 • HT 12 • OAH 72 (OverAll Height)	ECF	23,400lm LED (146W)	1	PC	AD PA	AS	D1 DB FD
	EGK	30,500lm LED (209W)	1	PC	AD PA	AS	D1 DB FD
	FJS	6-100W A21 (600W)	1	PC	AD PA	AS	FD DB
SC4514L • W 45 • HT 14 • OAH 72 (OverAll Height)	ECE	33,500lm LED (185W)	1	PC	AD PA	AS	D1 DB FD
	FJT	6-100W A21 (600W)	1	PC	AD PA	AS	FD DB

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key**Lamps**

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser

PA Premium Acrylic Diffuser

Mountings

AS Air Craft Cable & Stem

Dimming

D1 LED 0-10v dimming options include integral 120-277v dimming drivers

Options

FD Frosted Diffuser

DB Double Bowl