


Sacramento Series Wall Bracket




| Model Number | Lamping Code | Body Lamping | Circuit | Finish | Diffuser | Mounting | Options |
|----------------|-------------------|-------------------|-------------------|--------|----------|----------|----------|
| SC1814B | EMQ | 3,200lm LED (20W) | 1 | PC | AD PA | WM | D1 FD |
| | • W 18 • HT 14 | BCZ | 1-100W A21 (100W) | 1 | PC | AD PA | WM FD |
| SC2417B | EMR | 3,200lm LED (20W) | 1 | PC | AD PA | WM | D1 FD |
| | • W 24 • HT 17 | BDB | 1-100W A21 (100W) | 1 | PC | AD PA | WM FD |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

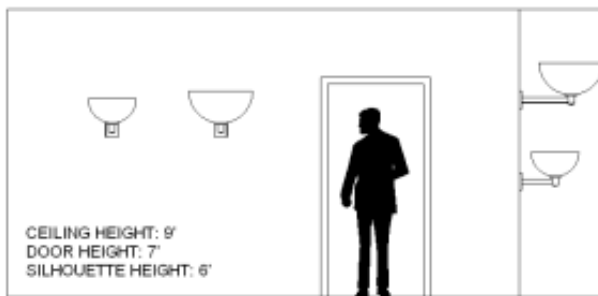

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Mounts to standard electrical junction box (by others)
- LED Battery Back-Up Available
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

AD Standard Acrylic Diffuser

PA Premium Acrylic Diffuser

Mountings

WM Wall Mount

Dimming

D1 LED 0-10v dimming options include integral 120-277v dimming drivers

Options

FD Frosted Diffuser

