



San Francisco Series Pendant

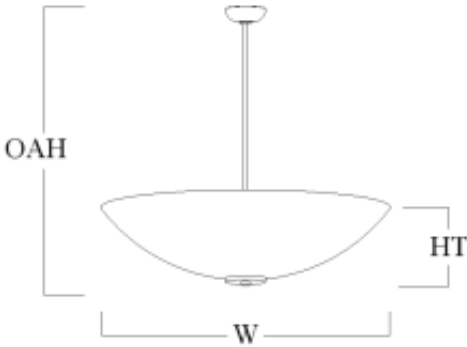

Model Number	Lamping Code	Body Lamping	Up Lamping	Down Lamping	Circuit	Finish	Diffuser	Mounting	Options
SF2409L • W 24" • HT 9" • OAH 36" (OverAll Height)	FEX		2,600lm LED (18W)	2,000lm LED (14W)	1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
	BED	3-100W A21 (300W)			1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
SF3010L • W 30" • HT 10" • OAH 48" (OverAll Height)	DOL	9,600lm LED (70W)	6,400lm LED	3,200lm LED	1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
	EBN	15,300lm LED (109W)	10,200lm LED	5,100lm LED	1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
	BEG	3-100W A21 (300W)			1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
SF3612L • W 36" • HT 12" • OAH 60" (OverAll Height)	DON	9,600lm LED (70W)	6,400lm LED	3,200lm LED	1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
	DVF	16,400lm LED (119W)	10,900lm LED	5,400lm LED	1	PC	WA	ST	DB

							PA	CH SM SP MS AS RS CS	
	FYG	10,900lm LED (80W)	5,400lm LED (40W)	2	PC	WA PA	ST CH SM SP MS AS RS CS	DB	
	FJO	3-100W A21 (300W)		1	PC	WA PA	ST CH SM SP MS AS RS CS	DB	
SF4214L • W 42" • HT 14" • OAH 72" (OverAll Height)	EBO	14,400lm LED (93W)	10,800lm LED	3,600lm LED	1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
	EBP	28,700lm LED (212W)	21,500lm LED	7,100lm LED	1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
	BEO	6-MAX 50W LED Med. Base (300W)			1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
SF5318L • W 53" • HT 18" • OAH 72" (OverAll Height)	EBQ	25,300lm LED (176W)	19,000lm LED	6,300lm LED	1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
	EBR	33,000lm LED (247W)	24,700lm LED	8,200lm LED	1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
	FFB	36,500lm LED (282W)	27,400lm LED	9,100lm LED	1	PC	WA PA	ST CH SM SP MS AS RS CS	DB
	FJN	6-MAX 50W LED Med. Base (300W)			1	PC	WA PA	ST CH SM SP MS AS RS CS	DB

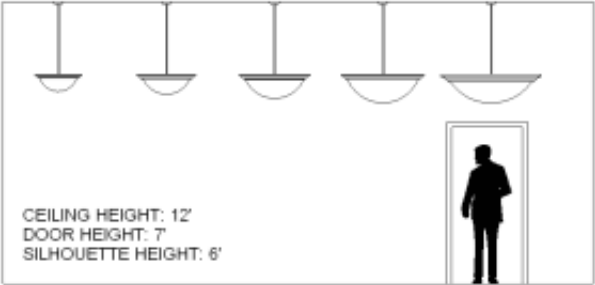

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic bowl diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamps	
100W A21	Medium Base, 100W Max, Incandescent or LED
MAX 50W LED Med. Base	50W-LED A21, medium base
Finish Types	
PC	Powder Coat
Diffuser Types	
WA	Standard Acrylic Diffuser
PA	Premium Acrylic Diffuser
Mountings	
ST	Stem
CH	Chain
SM	Surface Mount Chain
SP	Steep Pitch Canopy for Stem
MS	Multi-Stem
AS	Air Craft Cable & Stem
RS	Rod & Stem
CS	Chain & Stem
Dimming Types	
0	D1
1	D2
2	D3
Options	
DB	Double Bowl