
## **Savannah Series 3-Arm Cluster Pendant**





| Model Number | Lamping<br>Code | Body Lamping      | Down Lamping      | Circuit | Finish | Diffuser | Mounting | Louver | Options     |
|--------------|-----------------|-------------------|-------------------|---------|--------|----------|----------|--------|-------------|
| SV2724U      | GCH             | 12-60W A19 (720W) | 3-100W A19 (300W) | 2       | PC     | WA       | ST<br>SP | SQ     | SIL<br>LOGO |

- W 27"
- HT 32"
- OAH 72" (OverAll Height)
- Y 3 @ 10"x24"


| • W 43<br>• HT 36<br>• OAH 96<br>(OverAll Height)<br>• Y 3 @ 13"x28" | DQI | 43,600lm LED (258W) | 21,400lm LED (152W) | 2 | PC | WA | ST<br>SP | SQ | SIL<br>LOGO |
|--|-----|---------------------|---------------------|---|----|----|----------|----|-------------|
|  | DQJ | 69,300lm LED (436W) | 37,600lm LED (278W) | 2 | PC | WA | ST<br>SP | SQ | SIL<br>LOGO |
|  | GCI | 18-60W A19 (1080W)  | 3-100W A21 (300W)   | 2 | PC | WA | ST<br>SP | SQ | SIL<br>LOGO |
| • W 52<br>• HT 41<br>• OAH 96<br>(OverAll Height)<br>• Y 3 @ 13"x33" | EAT | 43,600lm LED (258W) | 37,600lm LED (278W) | 2 | PC | WA | ST<br>SP | SQ | SIL<br>LOGO |
|  | DQD | 69,300lm LED (436W) | 37,600lm LED (278W) | 2 | PC | WA | ST<br>SP | SQ | SIL<br>LOGO |
|  | DSG | 88,700lm LED (575W) | 37,600lm LED (278W) | 2 | PC | WA | ST<br>SP | SQ | SIL<br>LOGO |
|  | GCJ | 18-60W A19 (1080W)  | 3-100W A21 (300W)   | 2 | PC | WA | ST<br>SP | SQ | SIL<br>LOGO |
| SV3936U  | GDX | 74,800lm LED (436W) | 37,600lm LED (278W) | 2 | PC | WA | ST<br>SP | SQ | SIL<br>LOGO |

- W 39" HT 44"
- OAH 120" (OverAll Height) Y 3 @ 12"x36"

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

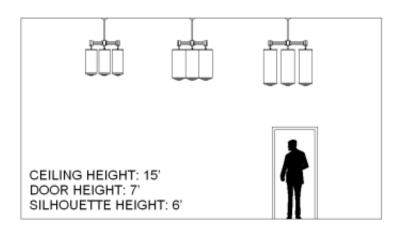

## PRODUCT FEATURES

- · Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
  Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamps

Medium Base, 60W Max, Incandesent or LED 60W A19

100W A19 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC **Powder Coat** 

**Diffuser Types** 

WA Standard Acrylic Diffuser

Mountings

Stem ST

SP Steep Pitch Canopy for Stem

Louvers

SQ Square Cell

**Dimming Types** 

0 D1

Options

SIL Silhouette Symbol

LOGO Custom Logo