


Taos Series 3-Arm Cluster Pendant

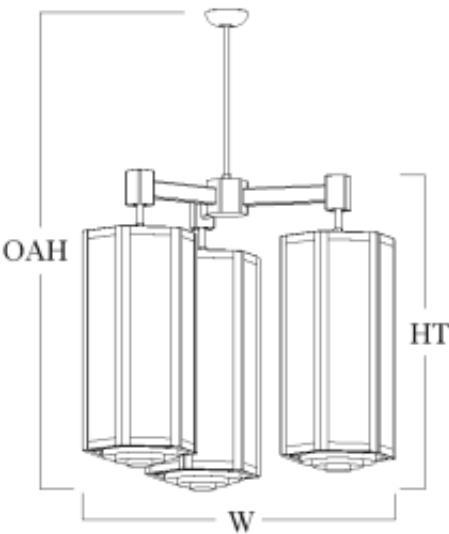

| Model Number                                                                                                                              | Lamping Code | Body Lamping        | Down Lamping        | Circuit | Finish | Diffuser | Mounting | Louver |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|---------------------|---------|--------|----------|----------|--------|
| TA2724U <ul style="list-style-type: none"><li>• W 37</li><li>• HT 33</li><li>• OAH 96 (OverAll Height)</li><li>• Y 3 @ 12"x25"</li></ul>  | GCT          | 12-60W A19 (720W)   | 3-100W A21 (300W)   | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
| TA3026U <ul style="list-style-type: none"><li>• W 42</li><li>• HT 35</li><li>• OAH 96 (OverAll Height)</li><li>• Y 3 @ 14"x28"</li></ul>  | DRI          | 43,600lm LED (258W) | 21,400lm LED (152W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | DRK          | 69,300lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | GCU          | 18-60W A19 (1080W)  | 3-100W A21 (300W)   | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
| TA3931U <ul style="list-style-type: none"><li>• W 53</li><li>• HT 41</li><li>• OAH 120 (OverAll Height)</li><li>• Y 3 @ 16"x33"</li></ul> | DRL          | 43,600lm LED (258W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | DRM          | 69,300lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | DRN          | 88,700lm LED (575W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | GCW          | 18-60W A19 (1080W)  | 3-100W A19 (300W)   | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
| TA4836U <ul style="list-style-type: none"><li>• W 63</li><li>• HT 46</li><li>• OAH 120 (OverAll Height)</li><li>• Y 3 @ 18"x38"</li></ul> | GAE          | 53,600lm LED (298W) | 15,500lm LED (108W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |

|     |                      |                     |   |    |          |          |    |
|-----|----------------------|---------------------|---|----|----------|----------|----|
| GAF | 53,600lm LED (298W)  | 20,100lm LED (141W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| FZY | 74,800lm LED (436W)  | 37,600lm LED (278W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| FZZ | 105,900lm LED (713W) | 37,600lm LED (278W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| GCY | 27-60W A19 (1620W)   | 3-100W A21 (300W)   | 3 | PC | WA<br>AG | ST<br>SP | SQ |

|                                                                      |
|----------------------------------------------------------------------|
| SAMPLE CATALOG NUMBER                                                |
| Model Number - Lamping Code - Finish - Mounting - Diffuser - Options |

Scale

CEILING HEIGHT: 15'  
DOOR HEIGHT: 7'  
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

| Abbreviation Key |                                           |
|------------------|-------------------------------------------|
| Lamps            |                                           |
| 60W A19          | Medium Base, 60W Max, Incandesent or LED  |
| 100W A21         | Medium Base, 100W Max, Incandesent or LED |
| Finish Types     |                                           |
| PC               | Powder Coat                               |
| Diffuser Types   |                                           |
| WA               | Standard Acrylic Diffuser                 |
| AG               | Premium Glass Diffuser                    |
| Mountings        |                                           |
| ST               | Stem                                      |
| SP               | Steep Pitch Canopy for Stem               |
| Louvers          |                                           |
| SQ               | Square Cell                               |
| Dimming Types    |                                           |
| 0                | D1                                        |
| 1                | D2                                        |
| 2                | D3                                        |