


Taos Series 3-Arm Cluster Pendant

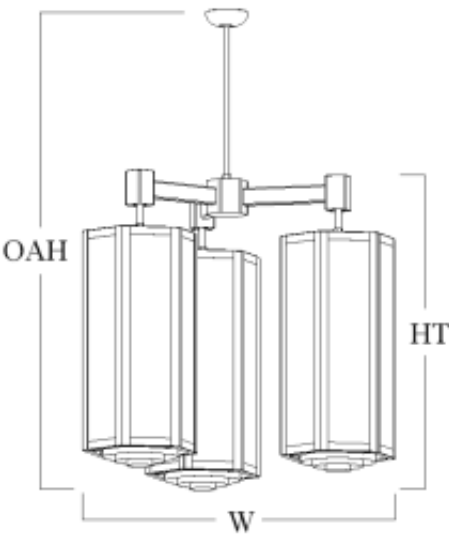

| Model Number                                                                                                                              | Lamping Code | Body Lamping        | Down Lamping        | Circuit | Finish | Diffuser | Mounting | Louver |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------------------|---------------------|---------|--------|----------|----------|--------|
| TA2724U <ul style="list-style-type: none"><li>• W 37</li><li>• HT 33</li><li>• OAH 96 (OverAll Height)</li><li>• Y 3 @ 12"x25"</li></ul>  | GCT          | 12-60W A19 (720W)   | 3-100W A21 (300W)   | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
| TA3026U <ul style="list-style-type: none"><li>• W 42</li><li>• HT 35</li><li>• OAH 96 (OverAll Height)</li><li>• Y 3 @ 14"x28"</li></ul>  | DRI          | 43,600lm LED (258W) | 21,400lm LED (152W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | DRK          | 69,300lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | GCU          | 18-60W A19 (1080W)  | 3-100W A21 (300W)   | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
| TA3931U <ul style="list-style-type: none"><li>• W 53</li><li>• HT 41</li><li>• OAH 120 (OverAll Height)</li><li>• Y 3 @ 16"x33"</li></ul> | DRL          | 43,600lm LED (258W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | DRM          | 69,300lm LED (436W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | DRN          | 88,700lm LED (575W) | 37,600lm LED (278W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           | GCW          | 18-60W A19 (1080W)  | 3-100W A19 (300W)   | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |
| TA4836U <ul style="list-style-type: none"><li>• W 63</li><li>• HT 46</li><li>• OAH 120 (OverAll Height)</li><li>• Y 3 @ 18"x38"</li></ul> | GAE          | 53,600lm LED (298W) | 15,500lm LED (108W) | 2       | PC     | WA AG    | ST SP    | SQ     |
|                                                                                                                                           |              |                     |                     |         |        |          |          |        |

|     |                      |                     |   |    |          |          |    |
|-----|----------------------|---------------------|---|----|----------|----------|----|
| GAF | 53,600lm LED (298W)  | 20,100lm LED (141W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| FZY | 74,800lm LED (436W)  | 37,600lm LED (278W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| FZZ | 105,900lm LED (713W) | 37,600lm LED (278W) | 2 | PC | WA<br>AG | ST<br>SP | SQ |
| GCY | 27-60W A19 (1620W)   | 3-100W A21 (300W)   | 3 | PC | WA<br>AG | ST<br>SP | SQ |

|                                                                      |
|----------------------------------------------------------------------|
| SAMPLE CATALOG NUMBER                                                |
| Model Number - Lamping Code - Finish - Mounting - Diffuser - Options |

Scale

CEILING HEIGHT: 15'  
DOOR HEIGHT: 7'  
SILHOUETTE HEIGHT: 6'

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

60W A19      Medium Base, 60W Max, Incandescent or LED

100W A21      Medium Base, 100W Max, Incandescent or LED

Finish Types

PC      Powder Coat

Diffuser Types

WA      Standard Acrylic Diffuser

AG      Premium Glass Diffuser

Mountings

ST      Stem

SP      Steep Pitch Canopy for Stem

Louvers

SQ      Square Cell

Dimming Types

0      D1

1      D2

2      D3