



Taos Series Ceiling Mount



Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver
TA1207C	AMY	2-100W A21 (200W)	1	PC	WA AG	CC	SQ
• W 12 • HT 9							
TA1408C	ANA	3-100W A21 (300W)	1	PC	WA AG	CC	SQ
• W 14" • HT 11"							
TA1609C	GFC	5,400lm LED (33W)	1	PC	WA AG	CC	SQ
• W 16" • HT 12"							
	ANC	3-100W A21 (300W)	1	PC	WA AG	CC	SQ
TA1811C	GFD	5,400lm LED (33W)	1	PC	WA AG	CC	SQ
• W 18" • HT 14"							
	ANE	3-100W A21 (300W)	1	PC	WA AG	CC	SQ
TA2208C	FYA	9,700lm LED (58W)	1	PC	WA AG	CC	SQ
• W 22 • HT 11							

SAMPLE CATALOG NUMBER	
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options	
Scale	Abbreviation Key
Lamps	
100W A21	Medium Base, 100W Max, Incandesent or LED

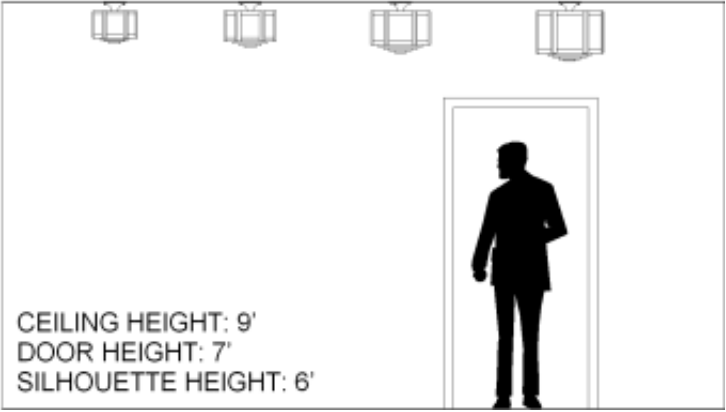

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Finish Types

PC Powder Coat

Diffuser Types

WA Standard Acrylic Diffuser

AG Premium Glass Diffuser

Mountings

CC Ceiling Canopy

Louvers

SQ Square Cell

Dimming Types

0 D1

1 D2