


Volusia Series Pendant






| Model Number | Lamping Code | Body Lamping | Down Lamping | Circuit | Finish | Diffuser | Mounting | Louver |
|---|-----------------|---------------------|---------------------|---------|--------|----------|----------------------|--------|
| • W 10" • HT 24" • OAH 72" (OverAll Height) | GBK | 4-60W A19 (240W) | 1-100W PAR38 (100W) | 2 | PC | WA | ST CH SM SP | SQ |
| • W 12" • HT 26" • OAH 96" (OverAll Height) | DVD | 14,500lm LED (86W) | 5,100lm LED (36W) | 2 | PC | WA | ST CH SM SP | SQ |
| | DNY | 14,500lm LED (86W) | 7,100lm LED (51W) | 2 | PC | WA | ST CH SM SP | SQ |
| | DNZ | 14,500lm LED (86W) | 12,500lm LED (93W) | 2 | PC | WA | ST CH SM SP | SQ |
| | DOA | 23,100lm LED (146W) | 7,100lm LED (51W) | 2 | PC | WA | ST CH SM SP | SQ |
| | ETG | 23,100lm LED (146W) | 10,400lm LED (76W) | 2 | PC | WA | ST CH SM SP | SQ |
| | DOB | 23,100lm LED (146W) | 12,500lm LED (93W) | 2 | PC | WA | ST CH SM SP | SQ |
| | FIY | 6-60W A19 (360W) | 1-100W PAR38 (100W) | 2 | PC | WA | ST CH SM SP | SQ |
| • W 12" • HT 31" • OAH 96" (OverAll Height) | DXL | 14,500lm LED (86W) | 7,100lm LED (51W) | 2 | PC | WA | ST CH SM SP | SQ |
| | DOS | 14,500lm LED (86W) | 12,500lm LED (93W) | 2 | PC | WA | ST CH SM SP | SQ |

| | DMF | 23,100lm LED (146W) | 12,500lm LED (93W) | 2 | PC | WA | ST CH SM SP | SQ |
|---|-----|---------------------------------------|--|---|----------|----|--|----|
| | DKO | · · · · · · · · · · · · · · · · · · · | 12,500lm LED (93W) 1-100W PAR38 (100W) | 2 | PC PC | WA | ST CH SM SP ST CH SM SP | SQ |
| | | | | | | | | |
| • W 12" • HT 36" • OAH 96" (OverAll Height) | GKG | 10,800lm LED (60W) | | 1 | PC | WA | ST CH SM SP | SQ |
| | GDZ | 15,400lm LED (86W) | 5,100lm LED(36W) | 2 | PC | WA | ST CH SM SP | SQ |
| | GEF | 17,800lm LED (100W) | 12,500lm LED (93W) | 2 | PC | WA | ST CH SM SP | SQ |
| | GES | 24,900lm LED (146W) | 12,500lm LED (93W) | 2 | PC | WA | ST CH SM SP | SQ |
| | GEV | 39,000lm LED (267W) | 12,500lm LED (93W) | 2 | PC | WA | ST CH SM SP | SQ |
| | GIX | 9-60W A19 (540W) | 1-100W PAR38 (100W) | 2 | PC | WA | ST CH SM SP | SQ |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

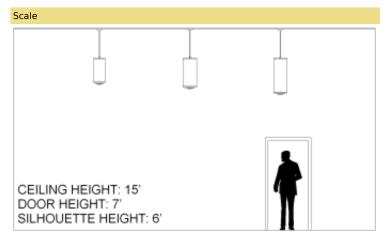

PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- · Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- · Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed

Abbreviation Key

Lamps

60W A19 Medium Base, 60W Max, Incandesent or LED 100W PAR38 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC **Powder Coat**

Diffuser Types

WA Standard Acrylic Diffuser

Mountings

ST Stem CH Chain

Surface Mount Chain SP Steep Pitch Canopy for Stem

Louvers

SM

SQ Square Cell

D3

Dimming Types

D1 1 D2

