Winston Series Ceiling Mount






Model Number	Lamping Body Lan Code	nping	Circuit	Finish	Finish Accent		Mounting	Louver	Options
<pre>WI1007C • W 12 • HT 10</pre>	АНО	2-100W A21 (200W)	1	PC	WT CT	WA	СС	SQ	SIL LOGO
• W 14 • HT 12	GJJ	5,400lm LED (33W)	1	PC	WT CT	WA	CC	SQ	SIL LOGO
	AHQ	3-100W A21 (300W)	1	PC	WT CT	WA	CC	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

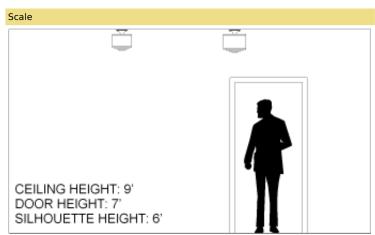

Abbreviation	Кеу					
Lamps						
100W A21	Medium Base, 100W Max, Incandesent or LED					
Finish Types						
PC	Powder Coat					
Finish Accent Types						
WT	Wood Trim					
СТ	Custom Trim					
Diffuser Type	S					
WA	Standard Acrylic Diffuser					
Mountings						
СС	Ceiling Canopy					
Louvers						
SQ	Square Cell					

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic cylinder diffuser (Standard)
 Optional specialty diffuser materials available
- Optional specially diffuser materia
 Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability

- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
 Standard LED dimming is 0-10v
 Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
 Mounts to standard electrical junction box (by others)
 UL / cUL or ETL / cETL listed
 Contact Us for more lamping options.

Dimming Types						
0	D2					
1	D1					
Options						
SIL	Silhouette Symbol					

Custom Logo

LOGO