


Winston Series Pendant

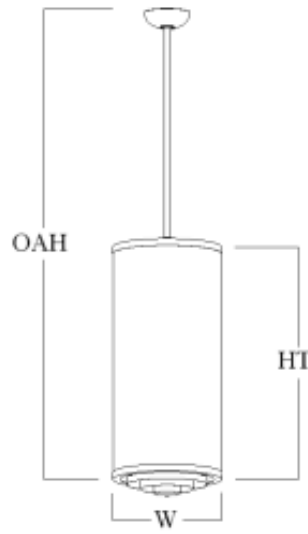


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Finish Accent	Diffuser	Mounting	Louver	Options
WI1024L <ul style="list-style-type: none"> • W 12 • HT 26 • OAH 72 (OverAll Height) 	GBK	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WT CT	AD	ST CH SM SP	CR SQ	SIL LOGO
WI1226L <ul style="list-style-type: none"> • W 14 • HT 29 • OAH 96 (OverAll Height) 	DVD	14,500lm LED (86W)	5,100lm LED (33W)	2	PC	WT CT	AD	ST CH SM SP	CR SQ	D1 D2 LOGO SIL
	DNY	14,500lm LED (86W)	7,100lm LED (47W)	2	PC	WT CT	AD	ST CH SM SP	CR SQ	D1 D2 LOGO SIL
	DNZ	14,500lm LED (86W)	12,500lm LED (85W)	2	PC	WT CT	AD	ST CH SM SP	CR SQ	D1 D2 D31A D32A LOGO SIL
	DOB	23,100lm LED (146W)	12,500lm LED (85W)	2	PC	WT CT	AD	ST CH SM SP	CR SQ	D1 D2 LOGO SIL
	FIY	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WT CT	AD	ST CH SM SP	CR SQ	SIL LOGO
WI1231L <ul style="list-style-type: none"> • W 14 • HT 34 • OAH 96 (OverAll Height) 	DOS	14,500lm LED (86W)	12,500lm LED (85W)	2	PC	WT CT	AD	ST CH SM SP	CR SQ	D1 D2 LOGO SIL
	DMF	23,100lm LED (146W)	12,500lm LED (85W)	2	PC	WT CT	AD	ST CH SM SP	CR SQ	D1 D12 D2 D31A D32A LOGO SIL
	DKO	29,500lm LED (192W)	12,500lm LED (85W)	2	PC	WT CT	AD	ST CH SM SP	CR SQ	D1 D12 D2 LOGO SIL

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

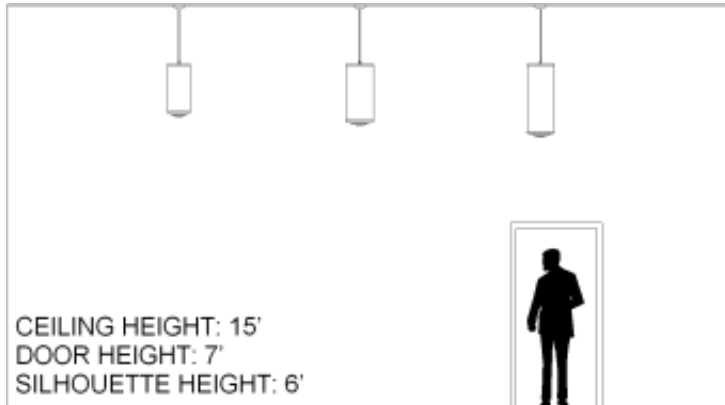

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Standard LED color temperature is 3000K with 80 CRI. Contact us for other color temperature or CRI options.
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

60W A19 Medium Base, 60W Max, Incandescent or LED

Finish Types

PC Powder Coat

Finish Accent Types

WT Wood Trim

CT Custom Trim

Diffuser Types

AD Standard Acrylic Diffuser

Mountings

ST Stem

CH Chain

SM Surface Mount Chain

SP Steep Pitch Canopy for Stem

Louvers

CR Concentric Ring

SQ Square Cell

Dimming

D1 LED 0-10v dimming options include integral 120-277v dimming drivers

D2 LED Triac/ELV dimming options include integral 120v dimming drivers

D31A LED 0-10v wireless dimming options include integral 120v dimming drivers and one wireless module

D32A LED 0-10v wireless dimming options include integral 120v dimming drivers and two wireless modules

D12 LED 0-10v dimming options include integral 120-277v dimming drivers with 1% minimum dimming level

Options

SIL Silhouette Symbol

LOGO Custom Logo