


# **Winston Series Wall Sconce**





Model Number	Lamping Code	Body Lamping	Circuit	Finish	Finish Accent		Mounting	Louver	Options
• W 10 • HT 18 • EXT 5	DYW	1,000lm LED (7W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	DYK	1,800lm LED (14W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	AHS	1-60W A19 (60W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
WI1020S  • W 12  • HT 22  • EXT 6	DYL	1,800lm LED (14W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	DYM	3,100lm LED (22W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	AHU	2-100W A21 (200W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
WI1224S  • W 14  • HT 27  • EXT 7	DYO	6,300lm LED (40W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	DYN	7,100lm LED (44W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL
	AHX	3-100W A21 (300W)	1	PC	WT CT	WA	WM	BD	SIL LOGO BL

### SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale


### Abbreviation Key

60W A19 Medium Base, 60W Max, Incandesent or LED 100W A21 Medium Base, 100W Max, Incandesent or LED

### Finish Types

PC

Powder Coat

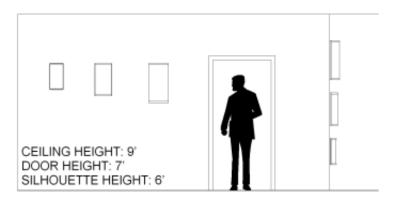

### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finishStained Solid Red Oak Wood Trim
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials availableEnergy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
- Standard LED CCT is 3000 Kelvin contact us for alternate color temperature
- Standard LED CRI is 80 contact us for alternate CRI availability
   Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Fin	ish	Accent Types

 $\operatorname{WT}$ Wood Trim СТ **Custom Trim** 

## Diffuser Types

WA Standard Acrylic Diffuser

#### Mountings

Wall Mount WM

### Louvers

BD**Bottom Perf Door** 

### **Dimming Types**

0 D1 D2 1 D3 2

### Options

SIL Silhouette Symbol LOGO Custom Logo BL**Bottom Lens** BD Bottom Door