

Winchester Series Pendant




| Model Number | Lamping Code | Body Lamping | Down Lamping | Circuit | Finish | Finish Accent | Diffuser | Diffuser Accent | Mounting | Louver | Options |
|--|--------------|---------------------|---------------------|---------|--------|---------------|----------|-----------------|----------------------|--------|--------------------------------|
| WR1024L | GBK | 4-60W A19 (240W) | 1-100W PAR38 (100W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | LOGO SIL |
| <ul style="list-style-type: none"> • W 12 • HT 26 • OAH 72 (OverAll Height) | | | | | | | | | | | |
| WR1226L | DVD | 14,500lm LED (86W) | 5,100lm LED (33W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 D2* LOGO SIL |
| <ul style="list-style-type: none"> • W 14 • HT 29 • OAH 96 (OverAll Height) | | | | | | | | | | | |
| | DNY | 14,500lm LED (86W) | 7,100lm LED (47W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 D2* D3 LOGO SIL |
| | DNZ | 14,500lm LED (86W) | 12,500lm LED (85W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 D2* D3 LOGO SIL |
| | DOA | 23,100lm LED (146W) | 7,100lm LED (47W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 D2* D3 LOGO SIL |
| | ETG | 23,100lm LED (146W) | 10,400lm LED (70W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 D2* LOGO SIL |
| | DOB | 23,100lm LED (146W) | 12,500lm LED (85W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 D2* D3 LOGO SIL |
| | FIY | 6-60W A19 (360W) | 1-100W PAR38 (100W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | LOGO SIL |
| WR1231L | DXL | 14,500lm LED (86W) | 7,100lm LED (47W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 LOGO SIL |
| <ul style="list-style-type: none"> • W 14 • HT 34 • OAH 96 (OverAll Height) | | | | | | | | | | | |

| | | | | | | | | | | |
|---|---------------------|---------------------|---|----|----------|----|------------|----------------------|----|--------------------------------|
| DOS | 14,500lm LED (86W) | 12,500lm LED (85W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 D2* D3 LOGO SIL |
| DMF | 23,100lm LED (146W) | 12,500lm LED (85W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 D2* D3 LOGO SIL |
| DKO | 29,500lm LED (192W) | 12,500lm LED (85W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 D2* D3 LOGO SIL |
| FIZ | 6-60W A19 (360W) | 1-100W PAR38 (100W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | LOGO SIL |
| WR1236L | GKG | 10,800lm LED (66W) | 1 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 LOGO SIL |
| • W 14 • HT 39 • OAH 96 (OverAll Height) | GDZ | 15,400lm LED (93W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 LOGO SIL |
| | GEF | 17,900lm LED (113W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 LOGO SIL |
| | GES | 24,900lm LED (159W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 LOGO SIL |
| | GEV | 33,800lm LED (231W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | D1 LOGO SIL |
| | GIX | 9-60W A19 (540W) | 2 | PC | WT CT | AD | DAC CDA | ST CH SM SP | SQ | LOGO SIL |

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

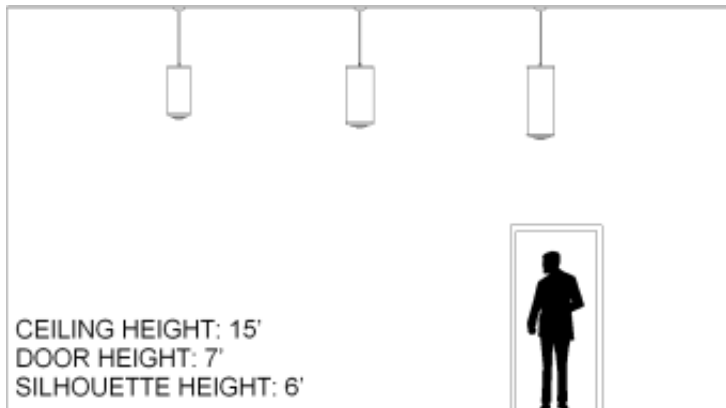

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v

Abbreviation Key

Lamps

- 60W A19 Medium Base, 60W Max, Incandescent or LED
 100W PAR38 Medium Base, 100W Max, Incandescent or LED

Finish Types

- PC Powder Coat

Finish Accent Types

- WT Wood Trim
 CT Custom Trim

Diffuser Types

- AD Standard Acrylic Diffuser

Diffuser Accent Types

- DAC Diffuser Accent Color
 CDA Custom Diffuser Accent

Mountings

- ST Stem

- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

| | |
|----|-----------------------------|
| CH | Chain |
| SM | Surface Mount Chain |
| SP | Steep Pitch Canopy for Stem |

Louvers

| | |
|----|-------------|
| SQ | Square Cell |
|----|-------------|

Dimming Types

| | |
|---|----|
| 0 | D1 |
| 1 | D2 |
| 2 | D3 |

Options

| | |
|------|-------------------|
| SIL | Silhouette Symbol |
| LOGO | Custom Logo |