


Winchester Series Pendant

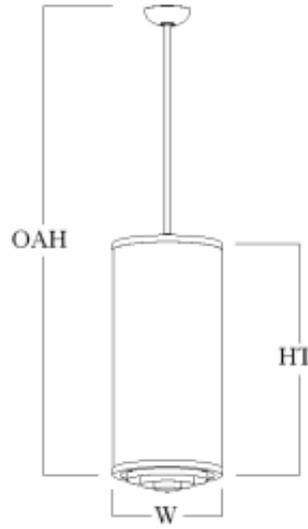


Model Number	Lamping Code	Body Lamping	Down Lamping	Circuit	Finish	Finish Accent	Diffuser	Diffuser Accent	Mounting	Louver	Options
WR1024L	GBK	4-60W A19 (240W)	1-100W PAR38 (100W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
<ul style="list-style-type: none"> • W 12 • HT 26 • OAH 72 (OverAll Height)											
WR1226L	DVD	14,500lm LED (86W)	5,100lm LED (36W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
<ul style="list-style-type: none"> • W 14 • HT 29 • OAH 96 (OverAll Height)											
	DNY	14,500lm LED (86W)	7,100lm LED (51W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	DNZ	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	DOA	23,100lm LED (146W)	7,100lm LED (51W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	ETG	23,100lm LED (146W)	10,400lm LED (76W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	DOB	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	FIY	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
WR1231L	DXL	14,500lm LED (86W)	7,100lm LED (51W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
<ul style="list-style-type: none"> • W 14 • HT 34 • OAH 96 (OverAll Height)											
	DOS	14,500lm LED (86W)	12,500lm LED (93W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	DMF	23,100lm LED (146W)	12,500lm LED (93W)	2	PC	WT	WA	DAC	ST	SQ	SIL

						CT		CDA	CH SM SP		LOGO
	DKO	29,500lm LED (192W)	12,500lm LED (93W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	FIZ	6-60W A19 (360W)	1-100W PAR38 (100W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
WR1236L	GKG	10,800lm LED (60W)		1	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
• W 14 • HT 39 • OAH 96 (OverAll Height)	GDZ	15,400lm LED (86W)	5,100lm LED (36W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	GEF	17,800lm LED (100W)	12,500lm LED (93W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	GES	24,900lm LED (146W)	12,500lm LED (93W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	GEV	39,000lm LED (267W)	12,500lm LED (93W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO
	GIX	9-60W A19 (540W)	1-100W PAR38 (100W)	2	PC	WT CT	WA	DAC CDA	ST CH SM SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

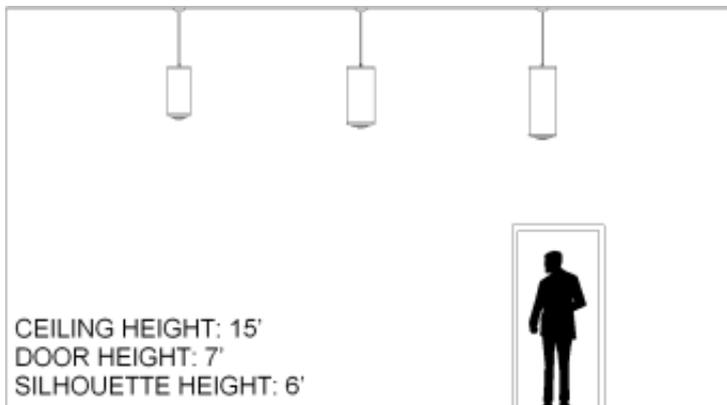

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Abbreviation Key

Lamps

- 60W A19 Medium Base, 60W Max, Incandescent or LED
100W PAR38 Medium Base, 100W Max, Incandescent or LED

Finish Types

- PC Powder Coat

Finish Accent Types

- WT Wood Trim
CT Custom Trim

Diffuser Types

- WA Standard Acrylic Diffuser

Diffuser Accent Types

- DAC Diffuser Accent Color
CDA Custom Diffuser Accent

Mountings

- ST Stem
CH Chain
SM Surface Mount Chain
SP Steep Pitch Canopy for Stem

Louvers

- SQ Square Cell

Dimming Types

0	D1
1	D2
2	D3

Options

SIL	Silhouette Symbol
LOGO	Custom Logo