


Winchester Series Pendant

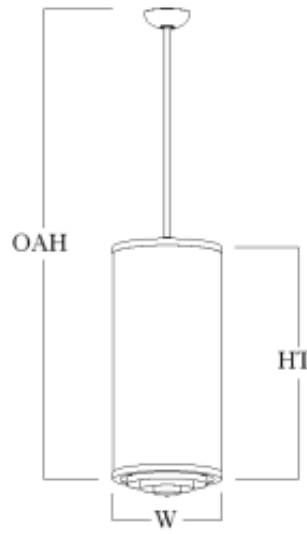


SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

Model	Lamping Options											Dimensions	
Model Number	Lamping Code	Body Lamping	Down Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	Dimensions		
WR1022L	AGP	3-100W-A21 (300W)	1-300W-R40 (300W)	120	2	PC	CR SQ	CH SS	AC		W	12"	
											HT	24"	
											OAH	6"	
WR1226L	DNZ	14,500lm LED (96W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AC	CC	W	14"	
	DNY	14,500lm LED (96W)	7,000lm LED (53W)	120/277	2		SQ	SS		D10	HT	29"	
	DVD	14,500lm LED (96W)	5,000lm LED (38W)	120/277	2					MC	OAH	96"	
	DOB	23,100lm LED (159W)	12,000lm LED (100W)	120/277	2					TC			
	DCJ	6-100W-A21 (600W)	1-300W-R40 (300W)	120	2								
WR1231L	DOS	14,500lm LED (96W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AC	CC	W	14"	
	DMF	23,100lm LED (159W)	12,000lm LED (100W)	120/277	2		SQ	SS		D10	HT	34"	
	DKO	29,500lm LED (213W)	12,000lm LED (100W)	120/277	2					MC	OAH	96"	
	DHM	6-100W-A21 (600W)	1-300W-R40 (300W)	120	2					TC			

Scale

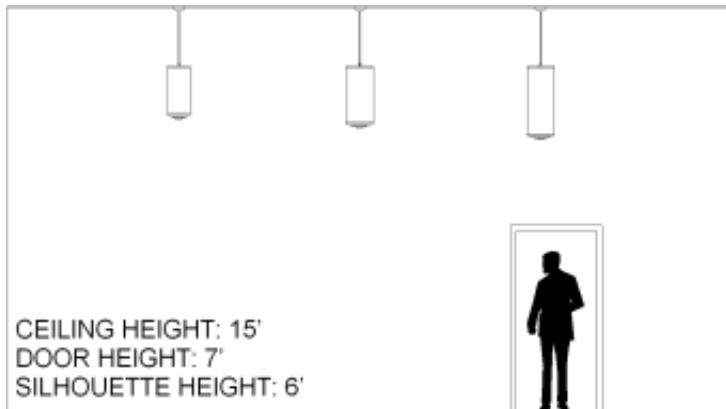

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

Lamp Descriptions

100W-A21	Medium Base, 100W Max, Incandescent or LED
300W-R40	300W R40, medium base
LED	3000 Kelvin Warm White LED

Finish Types

PC	Powder Coat
----	-------------

Hanging Style

SS	SINGLE STEM
----	-------------

- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

CH CHAIN

Diffuser Types

AC White Acrylic Cylinder

Options

D10 0-10V low voltage control dimming

MC Modern Cross

TC Triple Cross

CC Celtic Cross

Louver

CR CONCENTRIC RING (Not available on LED lamping)

SQ SQUARE CELL (Must be used on all LED lamping)