
## Winchester Series Wall Bracket






Model Number	Lamping Code	Body Lamping	Circuit	Finish	Finish Accent		Diffuser Accent	Mounting	Louver	Options
WR0816B • W 10 • HT 18 • EXT 13	AHZ	1-100W A21 (100W)	1	PC	WT CT	WA	DAC CDA	WM	SQ	SIL LOGO BL

WR1020B • W 12 • HT 22 • EXT 15	DEM	3,900lm LED (24W)	1	PC	WT CT	WA	DAC CDA	WM	SQ	SIL LOGO BL
	AIB	1-100W A21 (100W)	1	PC	WT CT	WA	DAC CDA	WM	SQ	SIL LOGO BL
WR1224B • W 14 • HT 27 • EXT 17	FFX	5,400lm LED(33W)	1	PC	WT CT	WA	DAC CDA	WM	SQ	SIL LOGO BL
	GBW	2-100W A21 (200W)	1	PC	WT CT	WA	DAC CDA	WM	SQ	SIL LOGO BL

#### SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

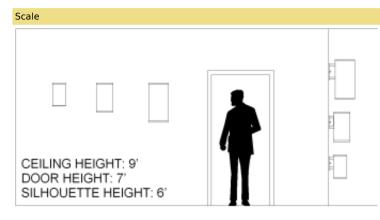

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim

### Abbreviation Key

Lamps					
100W A21	Medium Base, 100W Max, Incandesent or LED				
Finish Types					
PC	Powder Coat				
Finish Accent Types					
WT	Wood Trim				
СТ	Custom Trim				
Diffuser Types					

# WA

Standard Acrylic Diffuser

- UV stable, white acrylic cylinder diffuser (Standard)
  Optional specialty diffuser materials available
  Energy efficient LED lamping
  High power factor electronic LED driver
  Wired for single circuit operation, Body Lamping
  Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
  Standard LED CRI is 80 contact us for alternate CRI availability
  Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
  Standard LED dimming is 0-10v
  Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Mounts to standard electrical junction box (by others)
  UL / cUL or ETL / cETL listed

- Contact Us for more lamping options.

Diffuser Accent	Types
DAC	Diffuser Accent Color
CDA	Custom Diffuser Accent
Mountings	
WM	Wall Mount
Louvers	
SQ	Square Cell
Dimming Types	
0	D1
2	D3
Options	

SIL	Silhouette Symbol
LOGO	Custom Logo
BL	Bottom Lens