


Woodstock Series Wall Sconce WS2122S






Model Number	Lamping Code	Body Lamping	Circuit
WS2122S • W 9" • HT 20" • EXT 4"	DQB	2,100lm LED (16W)	1
	GKZ	3,400lm LED (25W)	1
	BUC	2-60W A19 (120W)	1

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

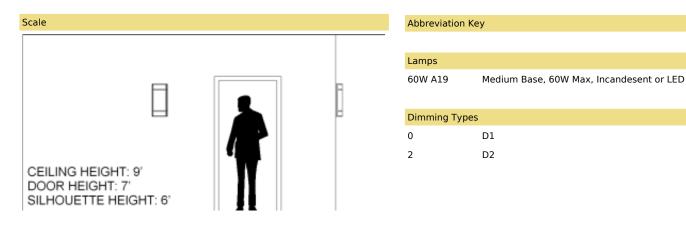

PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish
- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
 Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for single circuit operation, Body Lamping
 Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability

- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.
 Standard LED dimming is 0-10v
 Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
 Mounts to standard electrical junction box (by others)
 UL / cUL or ETL / cETL listed
 Contact Us for more lamping options.