


Wichita Series Ceiling Mount




SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

Model	Lamping Options										
Model Number	Lamping Code	Body Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	Dimensions	
WT1007C	AHP	2-F32TBX (77W)	120/277	1	PC	CR	CC	AC		W	13"
	AHO	2-100W-A21 (200W)	120	1		SQ				HT	10"
										OAH	N/A
WT1208C	DUC	3,800lm LED (34W)	120/277	1	PC	CR	CC	AC	CC	W	16"
	AHR	2-F42TBX (99W)	120/277	1		SQ			D10	HT	12"
	AHQ	3-100W-A21 (300W)	120	1					MC	OAH	N/A
									TC		

Scale

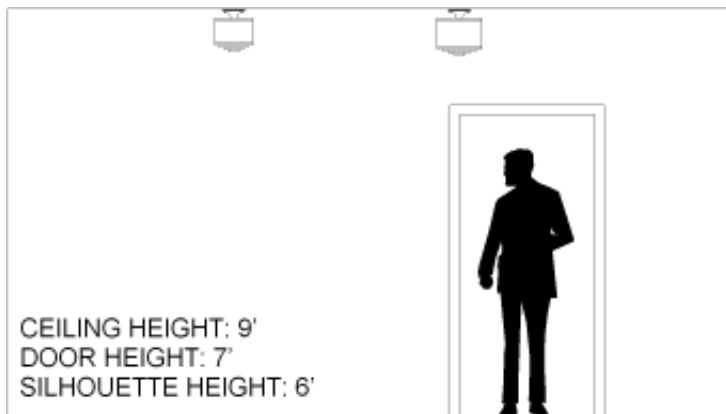

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

Lamp Descriptions

100W-A21	Medium Base, 100W Max, Incandesent or LED
F32TBX	32W triple biax, 4-PIN GX24q-3 base
F42TBX	42W triple biax, 4-PIN GX24q-4 base
LED	3000 Kelvin Warm White LED

Finish Types

PC	Powder Coat
----	-------------

Hanging Style

CC	Ceiling Canopy
----	----------------

Diffuser Types

- Mounts to standard 4" octagonal electrical junction box (by others)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

AC White Acrylic Cylinder

Options

D10	0-10V low voltage control dimming
MC	Modern Cross
TC	Triple Cross
CC	Celtic Cross

Louver

CR	CONCENTRIC RING (Not available on LED lamping)
SQ	SQUARE CELL (Must be used on all LED lamping)