
# **Wichita Series Short Pendant**






Model Number	Lamping Code	Body Lamping		Circuit		Finish Accent		Mounting	Louver	Options
• W 13 • HT 9 • OAH 48 (OverAll Height)	АНК	2-100W	A21 (200W)	1	PC	WT CT	WA	ST CH SM SP	SQ	SIL LOGO
• W 16 • HT 10 • OAH 48 (OverAll Height)	GGQ	5,400lm	n LED (33W)	1	PC	WT CT	WA	ST CH SM SP	SQ	SIL LOGO
	АНМ	3-100W	A21 (300W)	1	PC	WT CT	WA	ST CH SM SP	SQ	SIL LOGO

## SAMPLE CATALOG NUMBER

# Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

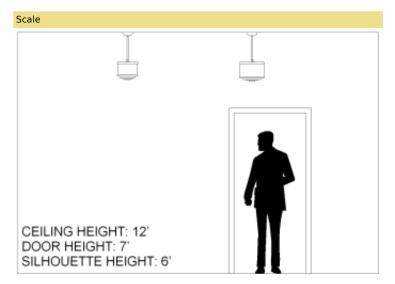

## PRODUCT FEATURES

- Fabricated and welded metal housing
- · Powder coated metallic finish

## Abbreviation Key

## Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

# Finish Types

PC Powder Coat

## Finish Accent Types

WT Wood Trim
CT Custom Trim

# Diffuser Types

WA Standard Acrylic Diffuser

## Mountings

ST Stem

- Stained Solid Red Oak Wood Trim
   UV stable, white acrylic cylinder diffuser (Standard)
   Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
   Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
- Standard LED CRI is 80 contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility.

  • Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH -Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- · Contact Us for more lamping options.

СН Chain

Surface Mount Chain SM

SP Steep Pitch Canopy for Stem

Louvers

Square Cell SQ

**Dimming Types** 

D1 0 D2

Options

1

SIL Silhouette Symbol

LOGO Custom Logo