
# Craft Metal Products Inc.

## Wichita Series Wall Bracket






Model Number	Lamping Code	Body Lamping	Circuit		Finish Accent		Mounting	Louver	Options
<b>WT0816B</b> • W 11 • HT 18 • EXT 14	AHZ	1-100W A21 (100W)	1	PC	WT CT	WA	WM	SQ	SIL LOGO BL

<ul> <li>WT1020B</li> <li>W 14</li> <li>HT 22</li> <li>EXT 17</li> </ul>	DEM	3,900lm LED (24W)	1	PC	WT CT	WA	WM	SQ	SIL LOGO BL
	AIB	1-100W A21 (100W)	1	PC	WT CT	WA	WM	SQ	SIL LOGO BL
WT1224B • W 16 • HT 27 • EXT 18	FFX	5,400lm LED (33W)	1	PC	WT CT	WA	WM	SQ	SIL LOGO BL
	GBW	2-100W A21 (200W)	1	PC	WT CT	WA	WM	SQ	SIL LOGO BL

#### SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

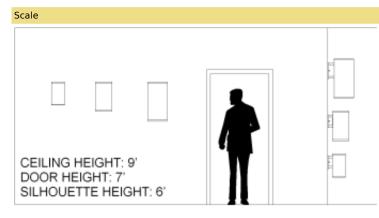

#### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- Stained Solid Red Oak Wood Trim

### Abbreviation Key

Lamps				
100W A21	Medium Base, 100W Max, Incandesent or LED			
Finish Types				
PC	Powder Coat			
Finish Accent Types				
WT	Wood Trim			
СТ	Custom Trim			
Diffuser Types				

# WA

Standar

Standard Acrylic Diffuser

- UV stable, white acrylic cylinder diffuser (Standard)
  Optional specialty diffuser materials available
  Energy efficient LED lamping
  High power factor electronic LED driver
  Wired for single circuit operation, Body Lamping
  Standard LED CCT is 3000 Kelvin contact us for alternate color temperature availability
  Standard LED CRI is 80 contact us for alternate CRI availability
  Incandescent lamping is Triac or ELV dimmable consult lamp and dimmer manufacturer for compatibility. manufacturer for compatibility.
- Standard LED dimming is 0-10v Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Mounts to standard electrical junction box (by others)
  UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

### Mountings WМ Wall Mount Louvers SQ Square Cell **Dimming Types** 0 D1 2 D3 Options SIL Silhouette Symbol LOGO Custom Logo

ΒL

Bottom Lens