



Hartford Series 2 Tier Large Pendant

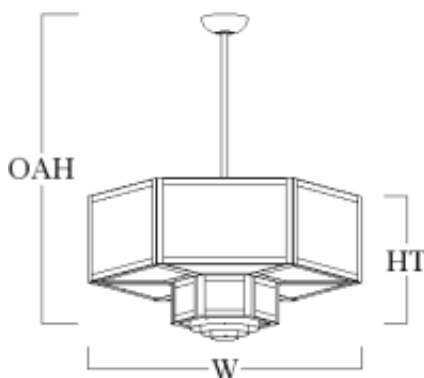

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

Model	Lamping Options												Dimensions	
Model Number	Lamping Code	Body2 Lamping	Gallery Lamping	Down Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	W	HT	
HF2412W	ACU ACT		6-F32TBX (221W) 6-MAX 100 IN/SBCF/LED (600W)	1-F42TBX (50W) 1-300R40 (300W)	120/277 120	2 2	PC	CR	CH SS	AD AG GA	DM LOGO SBL	W HT OAH	24" 14" 4'	
HF3014W	ACW ACV		6-F42TBX (290W) 6-150A21 (900W)	1-F42TBX (50W) 1-300R40 (300W)	120/277 120	2 2	PC	CR	CH SS	AD AG GA	DM LOGO SBL	W HT OAH	30" 16" 6'	
HF3616W	DVK ACY DFT	2,600lm LED (16W)	28,400lm LED (220W) 6-F57QBX (394W) 6-200A21 (1200W)	12,000lm LED (100W) 1-F70QBX (81W) 1-300R40 (300W)	120/277 120/277 120	2 2 2	PC	CR	CH SS	AD AG GA	DM LOGO SBL	W HT OAH	36" 19" 8'	
HF4218W	DZT ADB EIS	2,600lm LED (16W)	28,400lm LED (220W) 12-F42TBX (580W) 12-150A21 (1800W)	12,000lm LED (100W) 2-F70QBX (161W) 1-300R40 (300W)	120/277 120/277 120	2 2 2	PC	CR	CH SS	AD AG GA	DM LOGO SBL	W HT OAH	42" 21" 8'	
HF5422W	DVL EIR	4,600lm LED (32W)	32,900lm LED (256W) 12-150A21 (1800W)	12,000lm LED (100W) 1-300R40 (300W)	120/277 120	2 2	PC	CR	CH SS	AD AG GA	DM LOGO SBL	W HT OAH	54" 22" 10'	

Scale

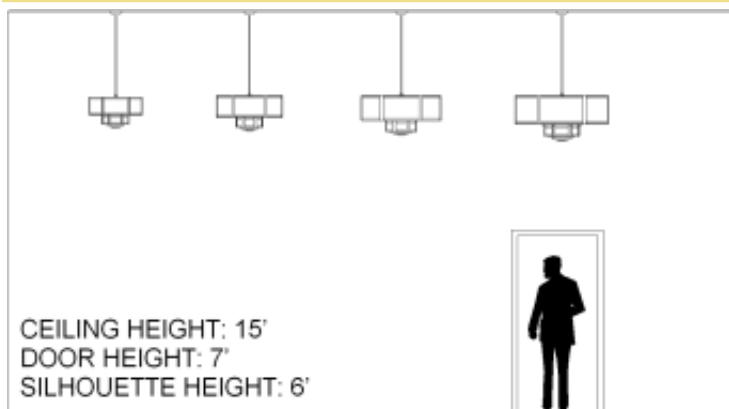

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	Overall Height

Lamp Descriptions

150A21	150W A21, medium base
200A21	200W A21, medium base
300R40	300W R40, medium base
MAX 100	Medium Base, 100W Max, Incandesent or LED

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for two circuit operation (Gallery Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

IN/SBCF/LED

F32TBX	32W triple biax, 4-PIN GX24q-3 base
F42TBX	42W triple biax, 4-PIN GX24q-4 base
F57QBX	57W quad biax, 4-PIN GX24q-5 base
F70QBX	70W quad biax, 4-PIN GX24q-6 base
LED	3000 Kelvin Warm White LED

Finishes

PC	Powder Coat
----	-------------

Hanging Style

SS	SINGLE STEM
CH	CHAIN

Diffusers

AD	Acrylic (White Acrylic Standard)
AG	Art Glass
GA	Glass Alternative

Options

DM	Dimming
DIM-010	0-10V four wire control dimming
SBL	Symbol
LOGO	Custom Logo

Louver

CR	CONCENTRIC RING (Not available on LED lamping)
----	--