


Jamestown Series 3 Arm Cluster Pendant

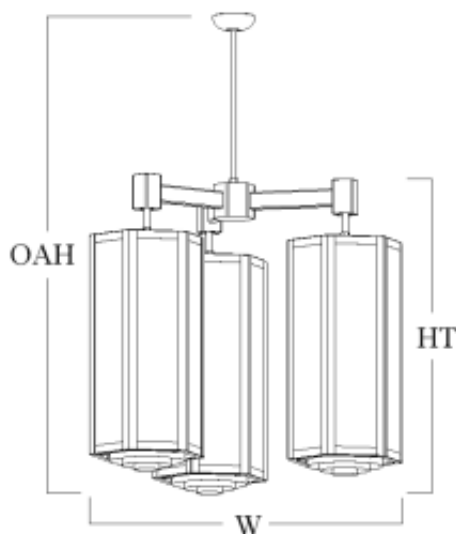

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Hanging - Diffuser - Options


Model	Lamping Options											
Model Number	Lamping Code	Body Lamping	Down Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	Dimensions	
JT2722U	AEY	6-F39BX (231W)	3-F70QBX (242W)	120/277	2	PC	CR	CH	AD	DM	W	38"
	AEW	9-MAX 100 IN/SBCF/LED (900W)	3-300R40 (900W)	120	2						HT	31"
JT3026U	DQK	44,100lm LED (288W)	21,000lm LED (159W)	120/277	2	PC	CR	CH	AD	DM	W	42"
	DQM	70,100lm LED (476W)	36,000lm LED (299W)	120/277	2						HT	36"
	AFA	12-F39BX (461W)	3-F70QBX (242W)	120/277	2						OAH	10'
	DIU	18-MAX 100 IN/SBCF/LED (1800W)	3-300R40 (900W)	120	2						Y	3 @ 10"x20"
JT3931U	DQN	44,100lm LED (288W)	36,000lm LED (299W)	120/277	2	PC	CR	CH	AD	DM	W	53"
	DQP	89,500lm LED (638W)	36,000lm LED (299W)	120/277	2						HT	41"
	DQO	70,100lm LED (476W)	36,000lm LED (299W)	120/277	2						OAH	10'
	AFD	12-F40BX (461W)	6-F70QBX (483W)	120/277	2						Y	3 @ 10"x20"
	AFF	18-F40BX (692W)	6-F70QBX (483W)	120/277	2						X	3 @ 16"x33"
	AFH	24-F40BX (922W)	6-F70QBX (483W)	120/277	2							
	AFI	18-F40BX (692W)	6-F70QBX (483W)	120/277	2							
	DIV	18-MAX 100 IN/SBCF/LED (1800W)	3-300R40 (900W)	120	2							
JT4836U	DQQ	70,700lm LED (432W)	36,000lm LED (299W)	120/277	2	PC	CR	CH	AD	DM	W	64"
	DQR	94,300lm LED (576W)	36,000lm LED (299W)	120/277	2						HT	46"
	AFK	12-F40BX (461W)	6-F70QBX (483W)	120/277	2						OAH	10'
	AFM	18-F40BX (692W)	6-F70QBX (483W)	120/277	2						Y	3 @ 10"x20"
	AFO	24-F40BX (922W)	6-F70QBX (483W)	120/277	2						X	3 @ 18"x38"
	AFN	18-F40BX (692W)	6-F70QBX (483W)	120/277	2							
	DIW	27-MAX 100 IN/SBCF/LED (2700W)	3-300R40 (900W)	120	3							

Scale

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	Overall Height
X	X-Dimension
Y	Y-Dimension

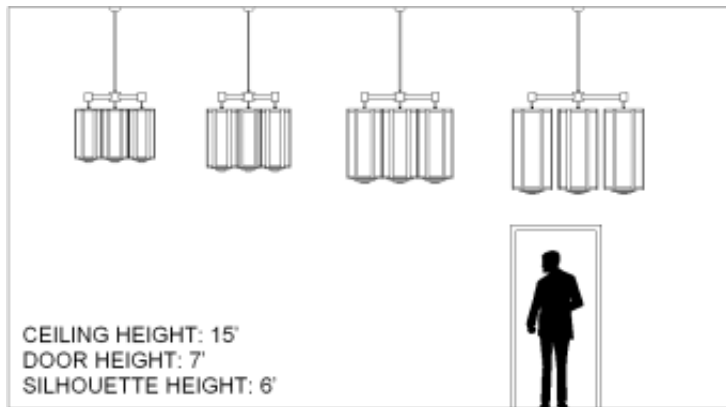

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamp Descriptions

300R40	300W R40, medium base
MAX 100 IN/SBCF/LED	Medium Base, 100W Max, Incandescent or LED
F39BX	39W high lumen biax, 4-PIN 2G11 base
F40BX	40W high lumen biax, 4-PIN 2G11 base
F70QBX	70W quad biax, 4-PIN GX24q-6 base
LED	3000 Kelvin Warm White LED

Finishes

PC	Powder Coat
----	-------------

Hanging Style

SS	SINGLE STEM
CH	CHAIN

Diffusers

AD	Acrylic (White Acrylic Standard)
AG	Art Glass
GA	Glass Alternative

Options

DM	Dimming
DIM-010	0-10V four wire control dimming

Louver

CR	CONCENTRIC RING (Not available on LED lamping)
SQ	SQUARE CELL (Must be used on all LED lamping)