


Lancaster Series 6 Arm Satellite Pendant

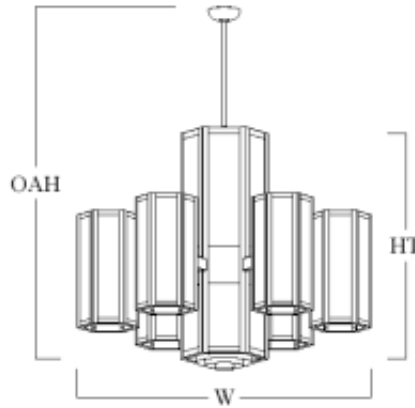

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Hanging - Diffuser - Options


Model	Lamping Options				
Model Number	Lamping Code	Body Lamping	Body2 Lamping	Satellite Lamping	Satellite Lamping
LC4836A	ADQ	4-F39BX (156W)		12-F39BX (468W)	
	EIB	2-F32TBX (77W) 3-60W-A19 (180W) 2-60W-A19 (120W)		12-60W-A19 (720W)	
LC6045A	ADS	4-F40BX (164W)		12-F39BX (468W)	
	EIC	2-F32TBX (77W) 6-60W-A19 (360W) 3-60W-A19 (180W)		12-60W-A19 (720W)	
LC7254A	EIZ	6,300lm LED (47W)	3,100lm LED (24W)	38,100lm LED (281W)	18,000lm LED (130W)
	ADU	6-F40BX (245W)		12-F40BX (490W)	
	EID	2-F32TBX (77W) 9-60W-A19 (540W) 3-60W-A19 (180W)		12-60W-A19 (720W)	

Scale

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height
X	X-Dimension
Y	Y-Dimension

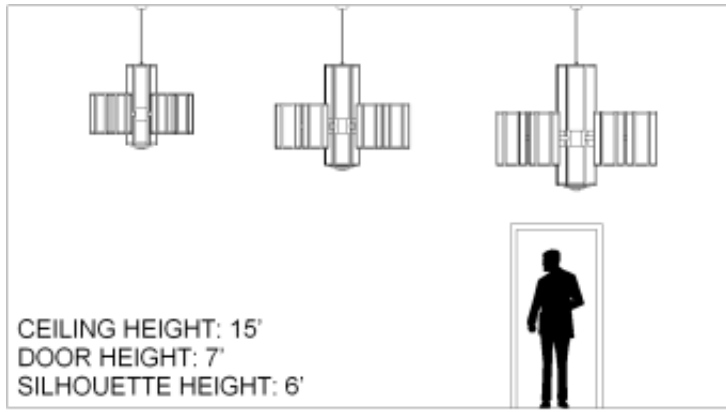

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for three circuit operation (Body Lamping/Down Lamping/Satellite Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others), Box requires additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamp Descriptions

60W-A19	Medium Base, 60W Max, Incandescent or LED
26W PAR38 LED	18W A21 LED
F39BX	39W high lumen biax, 4-PIN 2G11 base
F40BX	40W high lumen biax, 4-PIN 2G11 base
F32TBX	32W triple biax, 4-PIN GX24q-3 base
F70QBX	70W quad biax, 4-PIN GX24q-6 base
LED	3000 Kelvin Warm White LED

Finishes

PC	Powder Coat
----	-------------

Hanging Style

SS	SINGLE STEM
CH	CHAIN

Diffusers

AD	Acrylic (White Acrylic Standard)
AG	Art Glass

Options

DM	Dimming
DIM-010	0-10V low voltage control dimming

Louvers

CR	CONCENTRIC RING (Not available on LED lamping)
SQ	SQUARE CELL (Must be used on all LED lamping)