


Hartford Series Pendant

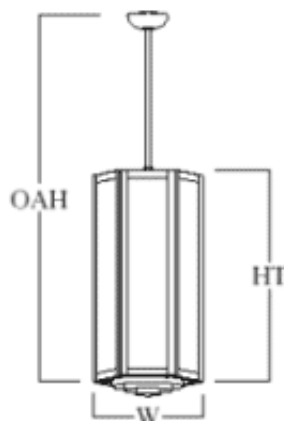

SAMPLE CATALOG NUMBER

Model Number - Lamping Code - Finish - Hanging - Diffuser - Options


Model	Lamping Options												
Model Number	Lamping Code	Body Lamping	Down Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	Dimensions		
HF1222L	AAF	2-F39BX (77W)	1-F70QBX (81W)	120/277	2	PC	CR	CH	AD	DIM-010	W	12"	
	ELB	3-60W-A19 (180W)	1-60W-A19 (60W)	120	2						HT	24"	
											OAH	6'	
											DM		
											LOGO		
											SBL		
HF1426L	DTG	14,700lm LED (96W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AD	DIM-010	W	14"	
	DVG	14,700lm LED (96W)	5,000lm LED (38W)	120/277	2						HT	29"	
	DFB	14,700lm LED (96W)	7,000lm LED (53W)	120/277	2						DM	OAH	8'
	DFJ	23,300lm LED (159W)	12,000lm LED (100W)	120/277	2								
	AAH	4-F39BX (156W)	1-F70QBX (81W)	120/277	2								
	DHI	6-100W-A21 (600W)	1-300W-R40 (300W)	120	2								
HF1631L	DFA	14,700lm LED (96W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AD	DIM-010	W	16"	
	DCR	29,800lm LED (213W)	12,000lm LED (100W)	120/277	2						HT	34"	
	DLX	23,100lm LED (159W)	12,000lm LED (100W)	120/277	2						DM	OAH	8'
	AAK	4-F40BX (154W)	2-F70QBX (161W)	120/277	2								
	AAM	6-F40BX (231W)	2-F70QBX (161W)	120/277	2								
	AAO	8-F40BX (308W)	2-F70QBX (161W)	120/277	2								
	DHJ	6-100W-A21 (600W)	1-300W-R40 (300W)	120	2								
HF1836L	DDL	23,500lm LED (144W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AD	DIM-010	W	18"	
	DNS	37,400lm LED (238W)	12,000lm LED (100W)	120/277	2						HT	40"	
	AAR	4-F40BX (154W)	2-F70QBX (161W)	120/277	2						DM	OAH	10'
	AAT	6-F40BX (231W)	2-F70QBX (161W)	120/277	2								
	AAV	8-F40BX (308W)	2-F70QBX (161W)	120/277	2								
	DHK	9-100W-A21 (900W)	1-300W-R40 (300W)	120	2								
HF2242L	DNF	32,700lm LED (216W)	12,000lm LED (100W)	120/277	2	PC	CR	CH	AD	DIM-010	W	22"	
	ABB	6-F40BX (231W)	3-F70QBX (242W)	120/277	2						HT	46"	
	ABE	8-F40BX (327W)	3-F70QBX (242W)	120/277	2						DM	OAH	10'
	ABK	12-F40BX (461W)	3-F70QBX (242W)	120/277	2								
	DHL	12-100W-A21 (1200W)	1-300W-R40 (300W)	120	3								

Scale

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

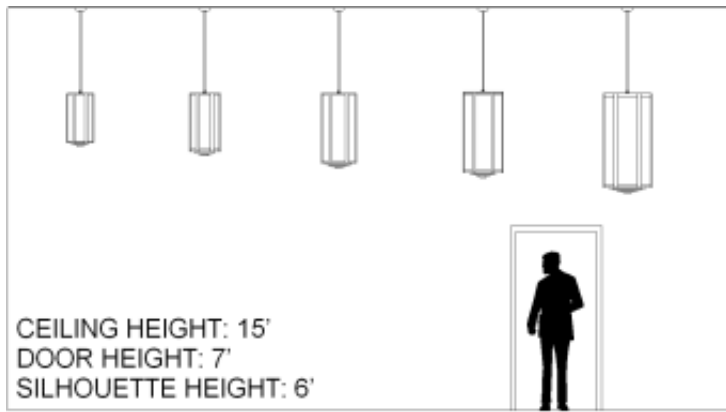

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for dual circuit operation (Body Lamping/Down Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Lamp Descriptions

60W-A19	Medium Base, 60W Max, Incandescent or LED
100W-A21	Medium Base, 100W Max, Incandescent or LED
300W-R40	300W R40, medium base
F39BX	39W high lumen biax, 4-PIN 2G11 base
F40BX	40W high lumen biax, 4-PIN 2G11 base
F70QBX	70W quad biax, 4-PIN GX24q-6 base
LED	3000 Kelvin Warm White LED

Finishes

PC	Powder Coat
----	-------------

Hanging Style

SS	SINGLE STEM
CH	CHAIN

Diffusers

AD	Acrylic (White Acrylic Standard)
AG	Art Glass

Options

DM	Dimming
DIM-010	0-10V four wire control dimming
SBL	Symbol
LOGO	Custom Logo

Louver

CR	CONCENTRIC RING (Not available on LED lamping)
SQ	SQUARE CELL (Must be used on all LED lamping)