



Hartford Series Short Pendant

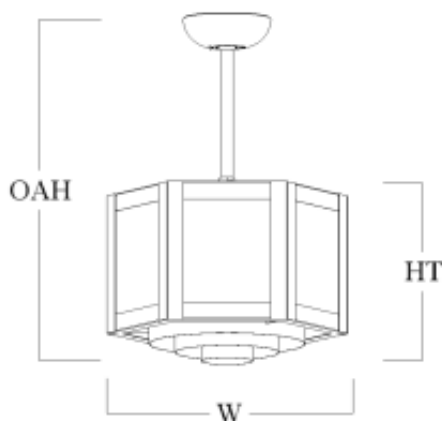

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

Model	Lamping Options												
Model Number	Lamping Code	Body Lamping	Voltage	Circuit	Finish	Louver	Hanging	Diffuser	Options	Dimensions			
HF1207P	ABM	2-F32TBX (77W)	120/277	1	PC	CR	CH	AD	DM	W	12"		
	ABL	2-100W-A21 (200W)	120	1						HT	9"	OAH	4'
HF1408P	DTT	2,600lm LED (24W)	120/277	1	PC	CR	CH	AD	DM	W	14"		
	ABO	2-F42TBX (99W)	120/277	1						HT	10"	OAH	4'
	ABN	3-100W-A21 (300W)	120	1									
HF1609P	DTU	3,800lm LED (34W)	120/277	1	PC	CR	CH	AD	DM	W	16"		
	ABQ	3-F42TBX (148W)	120/277	1						HT	11"	OAH	4'
	ABP	3-100W-A21 (300W)	120	1									
HF1811P	DTV	3,800lm LED (34W)	120/277	1	PC	CR	CH	AD	DM	W	18"		
	ABS	4-F42TBX (197W)	120/277	1						HT	14"	OAH	4'
	ABR	3-100W-A21 (300W)	120	1									

Scale

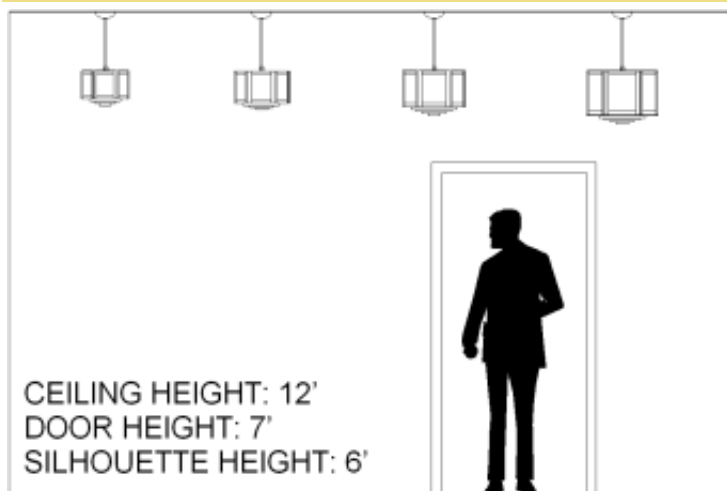

PRODUCT FEATURES

- Fabricated and welded metal housing

Abbreviation Key

Dimensions

W	Width
HT	Height
OAH	OverAll Height

Lamp Descriptions

100W-A21	Medium Base, 100W Max, Incandescent or LED
F32TBX	32W triple biax, 4-PIN GX24q-3 base
F42TBX	42W triple biax, 4-PIN GX24q-4 base
LED	3000 Kelvin Warm White LED

Finishes

PC	Powder Coat
----	-------------

Hanging Style

- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)
- High power factor electronic ballast or LED driver
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture may be Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard 4" octagonal electrical junction box (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

SS	SINGLE STEM
CH	CHAIN

Diffusers

AD	Acrylic (White Acrylic Standard)
AG	Art Glass

Options

DM	Dimming
----	---------

Louver

CR	CONCENTRIC RING (Not available on LED lamping)
SQ	SQUARE CELL (Must be used on all LED lamping)