


Portland Series Short Pendant

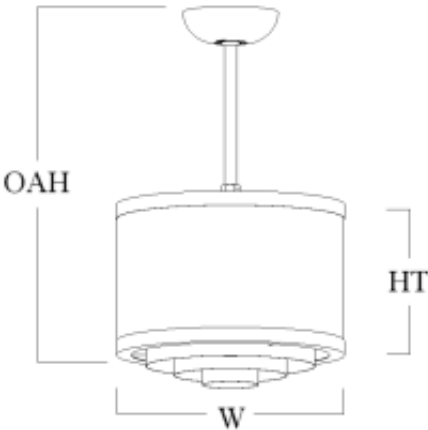

Model Number	Lamping Code	Body Lamping	Circuit	Finish	Diffuser	Mounting	Louver	Options
PO1007P	AHK	2-100W A21 (200W)	1	PC	WA	ST CH SM SP	SQ	SIL LOGO
• W 10" • HT 7" • OAH 48" (OverAll Height)								
PO1208P	GGQ	5,400lm LED (33W)	1	PC	WA	ST CH SM SP	SQ	SIL LOGO
• W 12" • HT 8" • OAH 48" (OverAll Height)								
	AHM	3-100W A21 (300W)	1	PC	WA	ST CH SM SP	SQ	SIL LOGO

SAMPLE CATALOG NUMBER
Model Number - Lamping Code - Finish - Mounting - Diffuser - Options

Scale

PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish

Abbreviation Key

Lamps

100W A21 Medium Base, 100W Max, Incandesent or LED

Finish Types

PC Powder Coat

Diffuser Types

WA Standard Acrylic Diffuser

Mountings

ST Stem

CH Chain

SM Surface Mount Chain

SP Steep Pitch Canopy for Stem

- UV stable, white acrylic cylinder diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED lamping
- High power factor electronic LED driver
- Wired for dual circuit operation, Body Lamping and Down Lamping
- Standard LED CCT is 3000 Kelvin - contact us for alternate color temperature availability
- Standard LED CRI is 80 - contact us for alternate CRI availability
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatibility.
- Standard LED dimming is 0-10v
- Optional line voltage (Triac or ELV) LED dimming is available - consult for compatibility
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

Louvers	
SQ	Square Cell
Dimming Types	
0	D1
1	D2
Options	
SIL	Silhouette Symbol
LOGO	Custom Logo