



## San Antonio Series Pendant

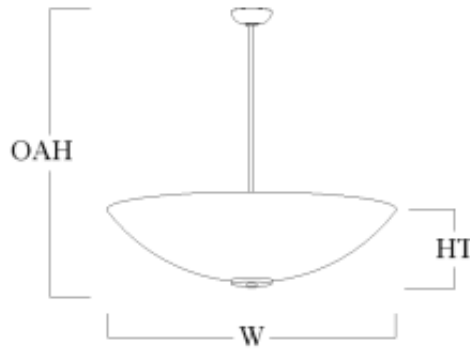

SAMPLE CATALOG NUMBER  
Model Number - Lamping Code - Finish - Hanging - Diffuser - Options

Model	Lamping Options												
Model Number	Lamping Code	Body Lamping	Voltage	Circuit	Finish	Hanging	Diffuser	Options	Dimensions				
SA2408L	EOL	5,200lm LED (39W)	120/277	1	PC	SS	AD	D10	W	24"			
	ECG	7,200lm LED (53W)	120/277	1					HT	8"			
	BBS	3-100W-A21 (300W)	120	1					OAH	36"			
SA3010L	EOM	7,200lm LED (53W)	120/277	1	PC	SS	AD	D10	W	30"			
	EEG	12,600lm LED (99W)	120/277	1					MS	FA	FD	HT	10"
	BBX	6-100W-A21 (600W)	120	1					OAH	48"			
SA3612L	EEF	14,400lm LED (108W)	120/277	1	PC	SS	AD	D10	W	36"			
	BCB	6-MAX 150 IN/SBCF/LED (900W)	120	1					MS	FA	FD	HT	12"
									OAH	60"			
SA4212L	ECF	20,400lm LED (159W)	120/277	1	PC	SS	AD	D10	W	42"			
	BCG	8-MAX 150 IN/SBCF/LED (1200W)	120	1					MS	FA	FD	HT	12"
									OAH	72"			
SA4514L	ECE	28,900lm LED (216W)	120/277	1	PC	SS	AD	D10	W	45"			
	BCL	8-MAX 200 IN/SBCF/LED (1600W)	120	1					MS	FA	FD	HT	14"
									OAH	72"			

### Scale

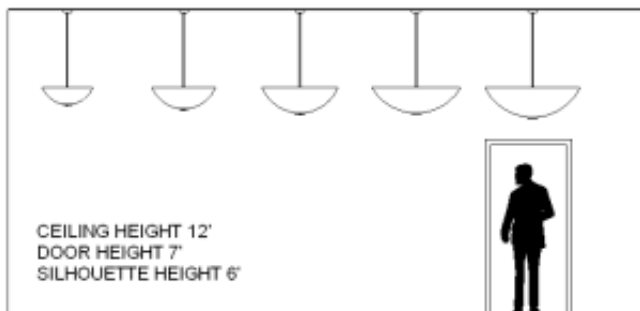

### PRODUCT FEATURES

- Fabricated and welded metal housing
- Powder coated metallic finish
- UV stable, white acrylic diffuser (Standard)
- Optional specialty diffuser materials available
- Energy efficient LED or fluorescent lamping
- Wired for single circuit operation (Body Lamping)

### Abbreviation Key

#### Dimensions

W	Width
HT	Height
OAH	OverAll Height

#### Lamp Descriptions

100W-A21	Medium Base, 100W Max, Incandesent or LED
MAX 150 IN/SBCF/LED	Medium Base, 150W Max, Incandesent or LED
MAX 200 IN/SBCF/LED	Medium Base, 200W Max, Incandesent or LED
LED	3000 Kelvin Warm White LED

- High power factor electronic ballast or LED driver
- Incandescent lamping is Triac or ELV dimmable - consult lamp and dimmer manufacturer for compatability.
- Optional dimming ballast 120V or 277V (LED or fluorescent lamping)
- Fixture is Chain or Stem hung (extra length may be added, specify OAH) (OAH - Over All Height - is the length from the ceiling to the bottom of the fixture.)
- Mounts to standard electrical junction box (by others), Box may require additional structural support (by others)
- For slopes greater than 35 degrees (from horizontal) order steep pitch adapter (Stem only)
- UL / cUL or ETL / cETL listed
- Contact Us for more lamping options.

#### Finish Types

PC	Powder Coat
----	-------------

#### Hanging Style

SS	SINGLE STEM
----	-------------

MS	MULTI-STEM
----	------------

#### Diffuser Types

AD	Acrylic (White Acrylic Standard)
----	----------------------------------

FA	Faux Alabaster
----	----------------

#### Options

D10	0-10V low voltage control dimming
-----	-----------------------------------

FD	Frosted Diffuser
----	------------------